



**RIGOL**

# MSO8000A Series

## Digital Oscilloscope

Data Sheet  
DSA31101-1110  
Apr. 2025

# MSO8000A Series Digital Oscilloscope

## Main Specifications


- Up to 10 GSa/s real-time sample rate
- Up to 500 Mpts memory depth (standard)
- High waveform capture rate (over 600,000 waveforms per second)
- Up to 450,000 frames of hardware real-time and ceaseless waveforms recording and playback
- Integrates 7 independent instruments into 1
- Analog bandwidth: 750 MHz, 1.5 GHz and 2 GHz (single-channel and half-channel modes)
- 10.1-inch capacitive multi-touch screen, 256-level intensity grading display, with color persistence
- Web Control and VNC remote command
- Waveform histogram analysis (standard)
- Auto measurement of 41 waveform parameters; full-memory hardware measurement function





## New UltraVision II Technology Platform

MSO8000A series digital oscilloscope adopts RIGOL's chipset "Phoenix", which can gain the data acquisition capability of up to 10 GSa/s sample rate, realizing the high integration of all the function modules required for the analog front-end (AFE), and greatly improving the consistency and reliability of the digital oscilloscope. This innovative UltraVision II technical

platform is equipped with higher waveform capture rate, full digital trigger technology, and full memory hardware measurement technology. The MSO8000A series digital oscilloscope also integrates multiple instrument modules, such as MSO, arbitrary waveform generator, digital voltmeter, 6-digit counter and totalizer, and protocol analyzer, offering extraordinary user experience at an unprecedented price point.

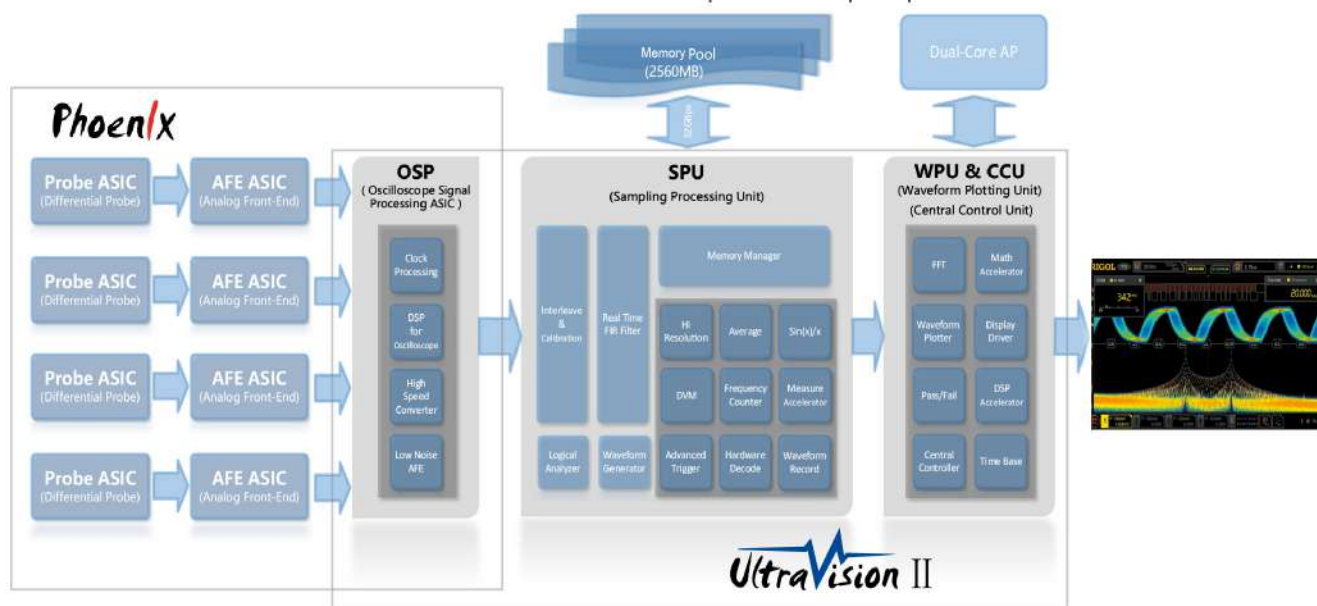

# MSO8000A Series Digital Oscilloscope

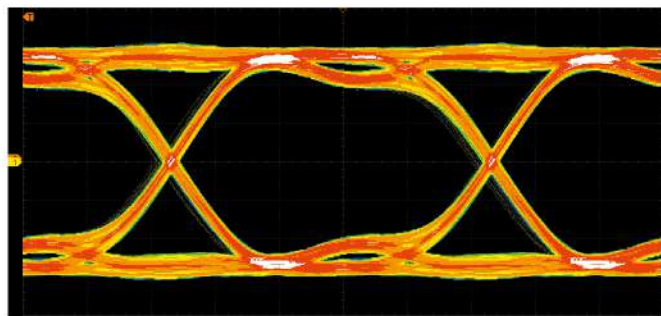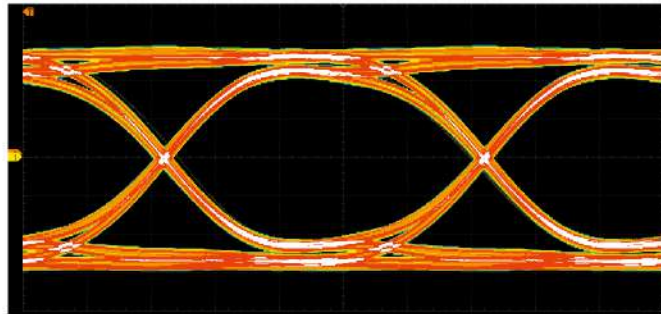

Use the 750 MHz bandwidth and 1.5 GHz bandwidth model respectively to perform eye measurement on the 1 Gb/s signal.

## Excellent Bandwidth and Sample Rate Make the Eye Diagram Pre-test Easy

Bandwidth and the sample rate are two key technical specifications that engineers take priority in choosing the digital oscilloscope. The higher the bandwidth of the oscilloscope, the better the oscilloscope can keep the steep fast edge, abundant harmonics components and energies of the signal under test. The sample rate determines the time interval of the sample points, and will affect the bandwidth of the oscilloscope.

The MSO8000A series provides a maximum of 2 GHz analog bandwidth and 10 GSa/s real-time sample rate. Its typical models are equipped with 750 MHz bandwidth, 1.5 GHz bandwidth and 2 GHz bandwidth. To view the subtle waveform details, you can upgrade the low bandwidth models to 2 GHz (single-channel and half-channel modes) at any time to achieve higher signal fidelity and lower resolution (as low as 100 ps, capable of reaching 2 ps for the minimum timebase) at an affordable price.

Based on the excellent bandwidth and sample rate, the MSO8000A series oscilloscope provides the real-time eye plot and measurement with the clock recovery function. In the digital signal world, you can use the eye measurement function of the oscilloscope to better observe the transmission quality of the digital signal and understand the strong and weak Inter-Symbol Interference in the system, so that you can make improvement in the system design. For those who need to frequently make qualitative test and verification for the electronic device, serial digital signal in the chip, or high-speed digital signal, it is undoubtedly a good choice for you to choose the MSO8000A series equipped with the eye measurement function.

The MSO8000A series supports the eye measurement for all the analog channels, and also provides measurement for several parameters of the eye diagram: eye height, eye width, eye amplitude, crossing percentage, and Q Factor. It also supports various clock recovery methods, such as constant clock (Auto, Semi-auto, Manual), First-order PLL, Second-order PLL, and explicit clock, to meet the demands of customers for different application scenarios.

# MSO8000A Series Digital Oscilloscope

## Visualize Signal Integrity with Advanced Jitter and Real-time Eye Measurements

In the analysis method and tools for signal integrity, real-time eye measurement and jitter analysis have already become the common debugging methods. The MSO8000A series oscilloscope not only provides the eye measurement function, but also offers the flexible and convenient jitter measurement and analysis, enabling the users to accurately and quickly make deterministic jitter measurement for serial clock signals or parallel bus signals.


If you have purchased and activated the MSO8000-JITTER option, the oscilloscope also supports real-time eye diagram and jitter analysis functions.

The various clock recovery methods supported include:

- Constant clock  
(Auto, Semi-auto, Manual)
- First-order PLL
- Second-order PLL
- Explicit clock

The jitter analysis is mainly used to measure and analyze the clock jitter. The MSO8000A series can accomplish the following jitter analysis items. Among the items, TIE is the most commonly used jitter specification.

- TIE
- Cycle to Cycle
- +Width to +Width
- -Width to -Width

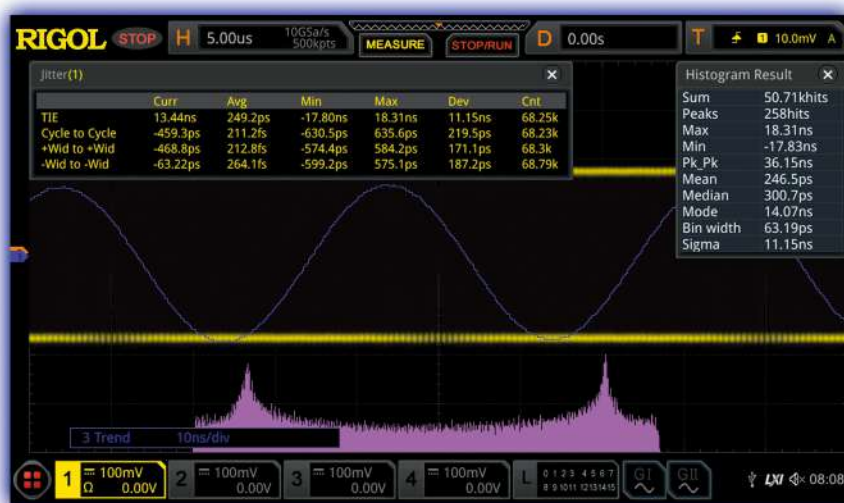

Perform TIE measurement on the clock signal with the jitter and make an analysis on the measurement results through trend graph and histogram.

To help engineers easily and conveniently find out the jitter components from the signal, the jitter measurement results can be visualized in various ways: jitter trend graph and jitter histogram. The jitter analysis function enables you to measure several uninterrupted bits at one time and make statistics, efficiently accomplishing the jitter analysis for the large quantity of data. From the jitter trend graph and histogram, you can get a quick view of the jitter nature and source, greatly improving the work efficiency of the engineers.



# MSO8000A Series Digital Oscilloscope

## Upgradable With the Software

The innovative physical appearance of the instrument and the thin design in both sides of the instrument ensure its proper LCD display and compact shape, making it portable and easy to operate. Moreover, the MSO8000A series is a great choice for you with limited budget. When leaving the factory, it is equipped with a standard configuration of hardware circuit for the highest analog bandwidth, the logic analyzer, and the arbitrary waveform generator. You do not have to spend time and energy in choosing which model is the most appropriate one while purchasing the oscilloscope. Just buy one and the optional function can be purchased later at any time when you need it.

- **Hardware supports the highest analog bandwidth**  
Any MSO8000A series model with a low bandwidth can be upgraded to a higher bandwidth at any time, without replacing the model.
- **LA interface available as a standard configuration for hardware**  
Any MSO8000A series model has a standard configuration of 16-channel logic analyzer interface and function software. If you need, purchase a probe RPL2316.
- **AWG output port available as a standard configuration for hardware**  
Any MSO8000A series model has a standard configuration of 2-channel AWG output ports. If you need, purchase the AWG option.

10.1" WSVGA (1024x600) capacitive multi-touch screen, 256-level intensity grading display

One-key Quick Operation

Touch Screen Switch Key

Independent Waveform Analysis Control Area

Dedicated Keys for Search and Navigation




AWG Output Ports

16 Digital Channels

4 Analog Channels

The 10.1-inch capacitive multi-touch screen supports various touch gestures, making it always keep up with the mainstream development trend for screen operation. The touch gestures such as "Tap", "Pinch & Stretch", "Drag", and "Rectangle Drawing" make you find the measurement operation more smooth, convenient, and easy to learn. Meanwhile, the MSO8000A series digital oscilloscope still keeps the knob and key operation as what RIGOL traditional digital oscilloscopes have, optimizing the user-friendly interactive experience to a large extent.

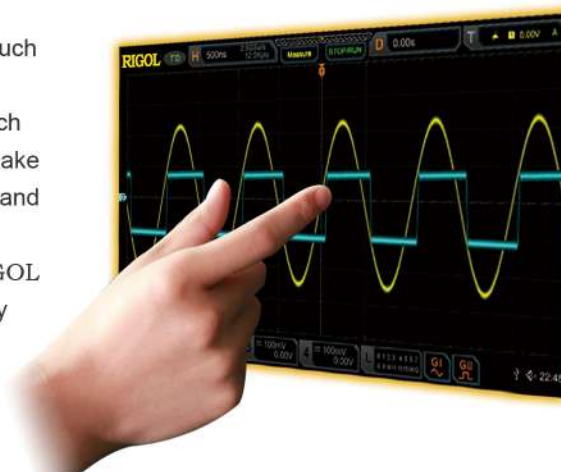

# Overview of RIGOL's Medium and High-end Series Products

|                                              | MSO5000                                                                           | DHO4000                                                                           | MSO/DS7000                                                                         | MSO8000                                                                             | MSO8000A                                                                            |
|----------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                              |  |  |  |  |  |
| <b>Analog Channel</b>                        | 2/4+16                                                                            | 4                                                                                 | 4+16                                                                               | 4+16                                                                                | 4+16                                                                                |
| <b>Analog Bandwidth</b>                      | 70 MHz to 350 MHz                                                                 | 200/400/800 MHz                                                                   | 100 MHz to 500 MHz                                                                 | 600 MHz/1 GHz/2 GHz                                                                 | 750 MHz/1.5 GHz/2 GHz                                                               |
| <b>Max. Sample Rate</b>                      | 8 GSa/s                                                                           | 4 GSa/s                                                                           | 10 GSa/s                                                                           | 10 GSa/s                                                                            | 10 GSa/s                                                                            |
| <b>Max. Memory Depth</b>                     | 200 Mpts (option)                                                                 | 500 Mpts (option)                                                                 | 500 Mpts (option)                                                                  | 500 Mpts                                                                            | 500 Mpts                                                                            |
| <b>Max. Waveform Capture Rate</b>            | 500,000 wfms/s                                                                    | 50,000 wfms/s (Vector mode)<br>1,500,000 wfms/s (UltraAcquire mode)               | 600,000 wfms/s                                                                     | 600,000 wfms/s                                                                      | 600,000 wfms/s                                                                      |
| <b>Max. Frames of Waveform Recording</b>     | 450,000                                                                           | 500,000                                                                           | 450,000                                                                            | 450,000                                                                             | 450,000                                                                             |
| <b>LCD</b>                                   | 9" capacitive multi-touch screen                                                  | 10.1" capacitive multi-touch screen                                               | 10.1" capacitive multi-touch screen                                                | 10.1" capacitive multi-touch screen                                                 | 10.1" capacitive multi-touch screen                                                 |
| <b>Hardware Mask Test</b>                    | Standard                                                                          | Standard                                                                          | Standard                                                                           | Standard                                                                            | Standard                                                                            |
| <b>Built-in Arbitrary Waveform Generator</b> | 2 CH, 25 MHz (option)                                                             | N/A                                                                               | 2 CH, 25 MHz (option)                                                              | 2 CH, 25 MHz (option)                                                               | 2 CH, 25 MHz (option)                                                               |
| <b>Built-in Digital Voltmeter</b>            | Standard                                                                          | Standard                                                                          | Standard                                                                           | Standard                                                                            | Standard                                                                            |
| <b>Built-in Hardware Counter</b>             | 6-digit frequency counter + totalizer                                             | 6-digit frequency counter + totalizer                                             | 6-digit frequency counter + totalizer                                              | 6-digit frequency counter + totalizer                                               | 6-digit frequency counter + totalizer                                               |
| <b>Search and Navigation</b>                 | Standard, supporting table display                                                | Standard, supporting table display                                                | Standard, supporting table display                                                 | Standard, supporting table display                                                  | Standard, supporting table display                                                  |

|                                   | <b>MSO5000</b>                                                 | <b>DHO4000</b>                                                         | <b>MSO/DS7000</b>                                              | <b>MSO8000</b>                                                         | <b>MSO8000A</b>                                                        |
|-----------------------------------|----------------------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------|
| <b>Power Analysis</b>             | Built-in UPA (option) + PC                                     | Built-in UPA (option) + PC                                             | Built-in UPA (option) + PC                                     | Built-in UPA (option) + PC                                             | Built-in UPA (option) + PC                                             |
| <b>Real-time Eye Diagram</b>      | N/A                                                            | N/A                                                                    | N/A                                                            | Option                                                                 | Option                                                                 |
| <b>Jitter Analysis</b>            | N/A                                                            | N/A                                                                    | N/A                                                            | Option                                                                 | Option                                                                 |
| <b>Serial Protocol Analysis</b>   | RS232/UART, I2C, SPI, CAN, LIN, FlexRay, I2S, and MIL-STD-1553 | RS232/UART, I2C, SPI, CAN, CAN-FD, LIN, FlexRay, I2S, and MIL-STD-1553 | RS232/UART, I2C, SPI, CAN, LIN, FlexRay, I2S, and MIL-STD-1553 | RS232/UART, I2C, SPI, CAN, CAN-FD, LIN, FlexRay, I2S, and MIL-STD-1553 | RS232/UART, I2C, SPI, CAN, CAN-FD, LIN, FlexRay, I2S, and MIL-STD-1553 |
| <b>Waveform Color Persistence</b> | Standard                                                       | Standard                                                               | Standard                                                       | Standard                                                               | Standard                                                               |
| <b>Histogram</b>                  | Standard                                                       | N/A                                                                    | Standard                                                       | Standard                                                               | Standard                                                               |
| <b>FFT</b>                        | Enhanced FFT, standard                                         | Enhanced FFT, standard                                                 | Enhanced FFT, standard                                         | Enhanced FFT, standard                                                 | Enhanced FFT, standard                                                 |
| <b>MATH</b>                       | Displays 4 functions at the same time                          | Displays 4 functions at the same time                                  | Displays 4 functions at the same time                          | Displays 4 functions at the same time                                  | Displays 4 functions at the same time                                  |
| <b>Connectivity</b>               | Standard: USB, LAN, and HDMI<br>option: USB-GPIB               | Standard: USB, LAN, and HDMI<br>option: USB-GPIB                       | Standard: USB, LAN, and HDMI<br>option: USB-GPIB               | Standard: USB, LAN, and HDMI<br>option: USB-GPIB                       | Standard: USB, LAN, and HDMI<br>option: USB-GPIB                       |

# Design Features


## 7-in-1 Integrated Digital Oscilloscope, with Excellent Performance at Unprecedented Price Point



In today's integration design field, a highly integrated multifunctional oscilloscope has become a useful tool for design engineers. RIGOL's MSO8000A series digital oscilloscope launched by RIGOL this time integrates 7 independent instruments into 1, including one digital oscilloscope, one 16-channel logic analyzer, one spectrum analyzer, one arbitrary waveform generator, one digital voltmeter, one high-precision frequency counter and totalizer, and one protocol analyzer. MSO8000A series offers you a flexible and economical solution to address your actual needs.


### Digital Oscilloscope

- Three bandwidth models: 2 GHz, 1.5 GHz, and 750 MHz; with the bandwidth upgradeable
- Up to 10 GSa/s real-time sample rate
- 4 analog channels and 1 EXT channel
- Up to 500 Mpts memory depth
- Maximum waveform capture rate of 600,000 wfms/s
- 500 MHz passive voltage probe for each channel (std.)
- Two 1.5 GHz passive low-impedance probes (std.) for the 2 GHz bandwidth model and two for the 1.5 GHz bandwidth model

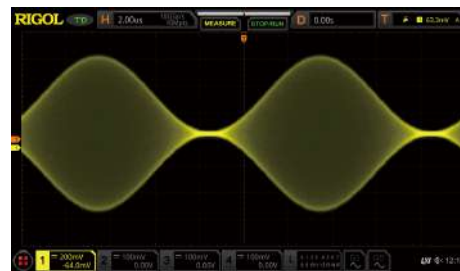


### Logic Analyzer

- Standard configuration of 16 digital channels and one optional RPL2316 logic analyzer probe
- 62.5 Mpts memory depth for the waveforms of all the digital channels
- Up to 1.25 GSa/s sample rate
- Hardware real-time waveform recording and playback functions supported
- Mixed (analog channel and digital channel) trigger and decode supported
- Convenient digital channel grouping and group operation

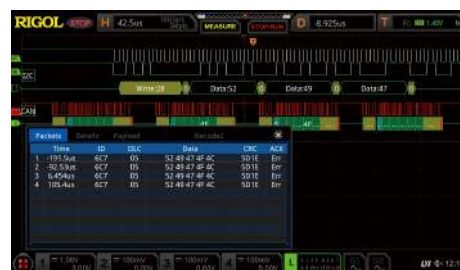


## Spectrum Analyzer

- Standard configuration of enhanced FFT, real-time operation for max. 1 Mpts waveform data
- Max. frequency range: oscilloscope analog bandwidth
- Up to 4 groups of operations can be displayed at the same time
- Independent FFT color persistence view supported
- Up to 15 peaks available for the peak search function; event table available to be exported

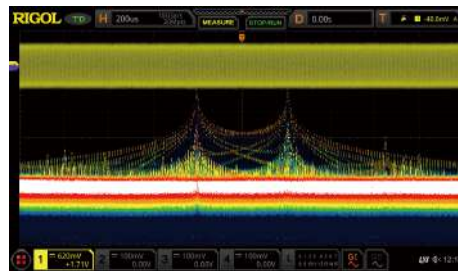

## Arbitrary Waveform Generator (Opt.)

- Standard hardware configuration of two waveforms output channels, AWG option is required to be ordered
- 13 pre-defined waveforms
- Up to 25 MHz frequency
- Up to 200 MSa/s sample rate
- Advanced modulation, sweep, and burst signal output supported

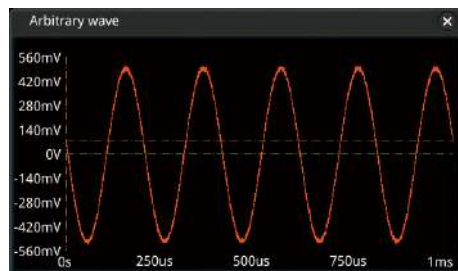

## Digital Voltmeter

- 3-digit DC, AC RMS, and AC+DC RMS voltage measurement
- Sound an alarm for reaching or exceeding the limits
- Display the latest measurement results in the form of a diagram, and display the extrema over the last 3 seconds




## High-Precision Frequency Counter and Totalizer

- 3 to 6-digit (selectable) high-precision frequency counter
- Support the statistics on the maximum and minimum values of the frequency
- 48-bit totalizer (std.)



## Protocol Analyzer (Opt.)

- Support RS232/UART, I2C, SPI, CAN, CAN-FD, LIN, I2S, FlexRay, and MIL-STD-1553 serial bus
- Support analog channels and digital channel trigger and decode
- RS232/UART, I2C, and SPI support waveform search function
- Work with waveform recording, pass/fail, and zone trigger

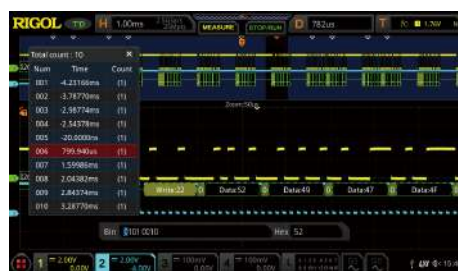


## 600,000 wfms/s Capture Rate

Engineers often have to spend a lot of time and efforts in locating the problem in design and debugging. Therefore, a proper debugging tool will help engineers to work more efficiently. The MSO8000A series digital oscilloscope can provide the waveform capture rate of up to 600,000 wfms/s, so that the glitches and infrequent events in waveforms can be quickly identified, greatly improving the debugging efficiency for the engineers.

256-level intensity grading display can reflect the occurrence frequencies of the infrequent events. Its newly added color persistence function can highlight the signal of different probabilities with a different color grading. You can set the persistence time to control the duration time for the waveforms to be displayed on the screen, so that the display capability of the infrequent events can be further enhanced.



Capture occasional exceptional signals in high refresh mode.

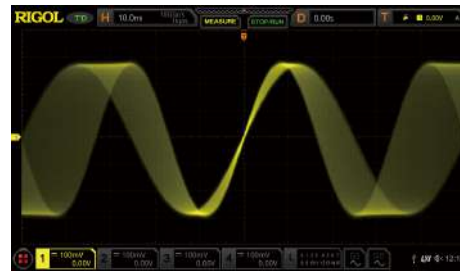


Changes of each frame of waveforms of the sweep signal can be clearly observed in high refresh mode.

## Hardware Full Memory Auto Measurement

The auto measurement is the basic tool for engineers to make a rapid analysis of the signals, and it requires more efficient measurement process and accurate measurement results. The MSO8000A series supports hardware full memory auto measurement, provides measurements of 41 waveform parameters, supports displaying the statistics and analysis of the measurement results for 10 items. In addition, the auto measurement function also supports auto cursor indicator and measurement range selection. You can also set the threshold for each measurement source independently, making the waveform measurement more flexible. To get a quick view about how to make measurements, we provide you with detailed help documents and diagrams to better illustrate the measurement methods for each item.

Based on the different data sources, auto measurement consists of two modes: Normal and Precision. In Normal mode, the data volume increases from 1 k to 1 M, optimizing the basic measurement function. In Precision mode, the oscilloscope provides hardware full-memory auto measurement, greatly improving the precision of the waveform measurement. With the 500 Mpts memory depth, any measurement for the item can be completed within 1.5 s, making long duration of high speed captures possible.

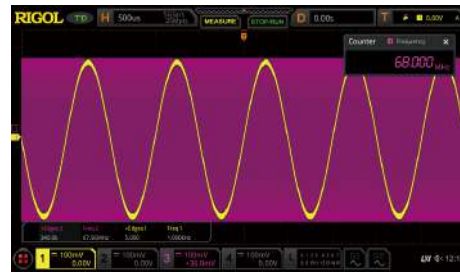


Observe and accurately measure two signals with great frequency deviations. The full-memory hardware measurement can measure accurate frequency value of the waveforms with 340k rising edges.



The ordinary 1 Mpts software measurement can no longer measure the accurate frequency of the high-frequency signal.

## Hardware Pass/Fail Test

The MSO8000A series is equipped with hardware pass/fail test function as the standard configuration, which can be used in signal monitoring for a long time, signal monitoring during design, and signal test in the production line. You can set the test mask based on the known "standard" waveform, and then compare the signal under test with the "standard" waveform to display the statistics on the test results. When a successful or failed test is detected by the oscilloscope, you can choose to immediately stop monitoring, enable the beeper to sound an alarm, or save the current screen image. Also, you can choose to continue monitoring.

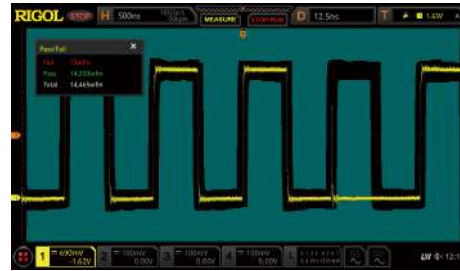


The Pass/Fail test function can quickly make statistics on the occurrence probability of the signal exceptions.

## Hardware Waveform Recording and Playback

The memory depth is one of the key specifications of the oscilloscope. However, no matter how high the memory depth, it cannot be guaranteed that all the signals that users are concerned about can be captured in one time. This is especially true for the occurrence of the infrequent signals during debugging design or locating specific events from the long captured complicated signals. In addition, the long memory depth will be bound to reduce the response time for the oscilloscope. The hardware waveform recording and playback function can address this issue.


The MSO8000A series provides ceaseless recording and playback for a maximum of 450,000 frames of hardware real-time waveforms. This specification is second to none in the industry. The hardware waveform recording function adopts the segmented storage technology. With the technology, you can set the trigger conditions to make a selective choice in capturing and saving the signals that you are interested in, then mark the time on the signal. This has not only ensured the high capture efficiency, but also prolonged the overall observation time for the waveforms. The hardware waveform playback function enables you to have sufficient time to take a careful view and analysis of the recorded segment of the waveforms.

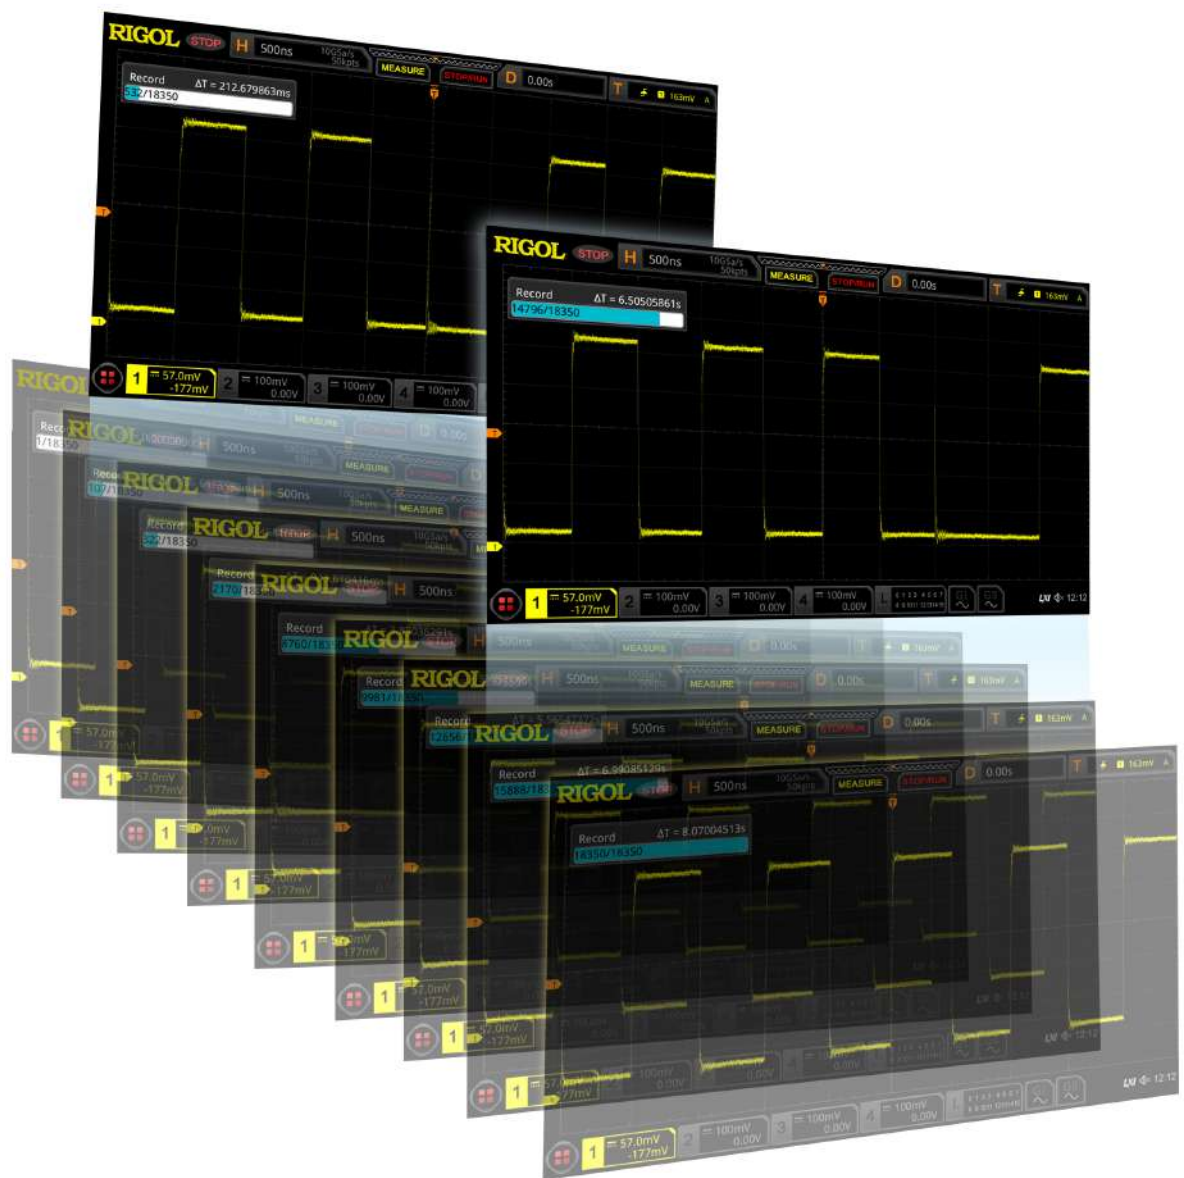

## Zone Trigger

In face of the complex and variable circuit signal in the circuit debugging, it is easy for us to find the transient occasional exception signals on the oscilloscope with a high waveform capture rate. However, it is not easy to isolate the exceptional signal from the complex circuit signals and trigger them stably. You have to spend more time on the usage of some advanced trigger types, and sometimes even the powerful advanced trigger is unable to make it. The MSO8000A series is specially equipped with touch screen-based zone trigger function, which can help users accelerate the signal isolation process. The zone trigger function is easy to operate. You only need to use the specified rectangle drawing gesture to draw one or two rectangular zones on the corresponding signal section, then you can quickly isolate the signal for observation.

The zone trigger works together with other 20 trigger types. The decoding, waveform recording, and pass/fail test functions are also supported. This is conducive to the debugging of the complex signals.

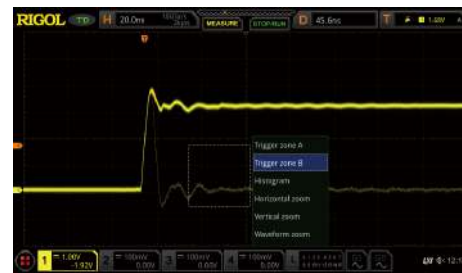


Draw a rectangle on the transient exception signal and select Trigger zone A.



Quickly isolate the exceptional signal with Edge trigger and Zone trigger.

## Search and Navigation


As the memory depth of the oscilloscope becomes higher, locating a specific event from the thousands of captured complicated waveforms is a tedious task that requires much time and efforts. The waveform search function can help you quickly locate the concerned events and make a mark. Then, you can use the specific navigation keys to quickly locate the marked signal and make measurements easily. The search conditions for waveform search include edge, pulse, runt pulse, and slope. The searched event information is displayed in the form of a list.

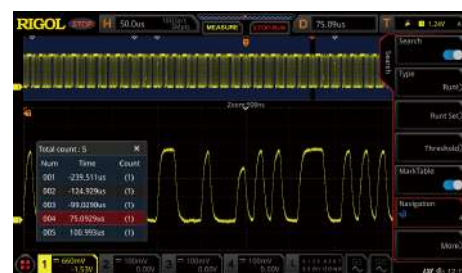

The search and navigation function can quickly search for the signals with exceptions and locate them accurately.

## Power Analysis (Opt.)

To cater to the increasing test demand for the switch power supply and the power component, we configure the MSO8000A series with the optional built-in power analysis software. The current power analysis software can complete the power quality analysis and ripple analysis. The power analysis software can help engineers analyze the commonly used power parameters rapidly and accurately, without needing to make tedious configurations manually or do complicated formula calculation.

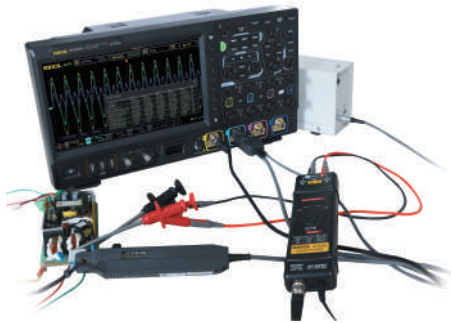



## Remote Control and Offline Analysis Software

The Web Control software, VNC, and Ultra Scope control analysis software are served as the standard configurations for the MSO8000A series. You can use them to migrate the instrument control and waveform analysis to the PC, and then click the mouse to operate easily.

You only need to input the IP address of the oscilloscope into the address bar of the Web browser to open the Web Control software. The display of the waveform interface and instrument control in the software are consistent with that in the MSO8000A series. You can use the mouse to click the menus in the Web Control interface to complete the waveform control, measurement, and analysis. In the Web Control interface, you can view the basic information of the instrument, set or modify the network status.

The VNC client (VNC Viewer) can be downloaded from its official website. When the VNC client is installed and your instrument is connected to the network, open the VNC Viewer client and input the IP address of the instrument into the VNC address bar. Then, you can view the screen of the instrument and operate the instrument remotely. The display of the waveform interface and instrument control in the software are consistent with that in the MSO8000A series. You can use the mouse to click the menus in the VNC interface to complete the waveform control, measurement, and analysis.

The powerful data analysis function of the MSO8000A series is not only limited to the oscilloscope itself. The Ultra Scope control analysis software can not only realize the basic control for the instrument, but also can export the 500 M waveform big data to the PC, and then make measurements, math operation, and analysis of the data offline. It also supports real-time monitoring of the oscilloscope status and multi-pane windowing on multiple instruments. The available remote control interfaces include USB, LAN, and GPIB. You can select any one of them to realize remote control.

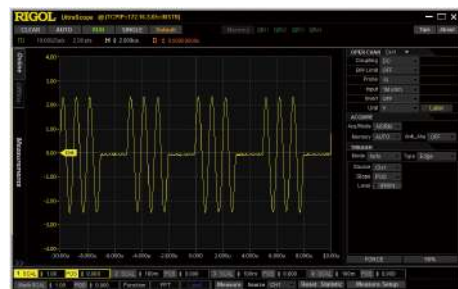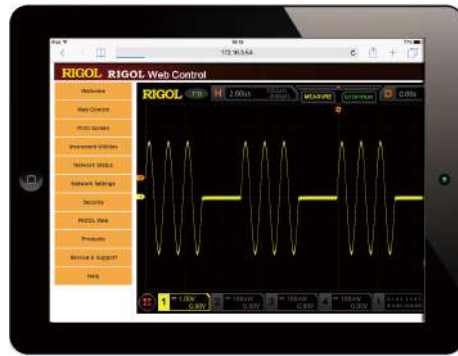

## User-defined One-key Quick Operation

There is a dedicated Quick key on the front panel of the MSO8000A series, enabling you to customize the function of the key and complete the commonly used operation quickly. With the customized setting of the Quick key, you can quickly capture the screen image, realize waveform saving, setup saving, all measurement, reset measurement statistics, reset pass/fail test statistics, waveform recording, send the mail, printing, and group saving.



## Multiple External Interfaces



The MSO8000A series provides a variety of external interfaces, including USB HOST & DEVICE, LAN (LXI), HDMI, TRIG OUT, and USB-GPIB (opt.). The oscilloscope is in compliance with the standards specified in *LXI Device Specification 2011*. The LXI web page is available to access via the LAN interface. You can purchase the USB-GPIB interface converter from RIGOL to enjoy the reliable GPIB communication service. It also provides HDMI video output interface.

# RIGOL Probes and Accessories Supported

## RIGOL Passive Probes

| Model                                                                                              | Type                 | Description                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>PVP2150</p>   | High-impedance Probe | <ul style="list-style-type: none"> <li>1X BW: DC to 35 MHz</li> <li>10X BW: DC to 150 MHz</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                              |
|  <p>PVP2350</p>   | High-impedance Probe | <ul style="list-style-type: none"> <li>1X BW: DC to 35 MHz</li> <li>10X BW: DC to 350 MHz</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                              |
|  <p>RP3500A</p> | High-impedance Probe | <ul style="list-style-type: none"> <li>BW: DC to 500 MHz</li> <li>Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, DHO4000/1000, and DS70000 series.</li> </ul>                   |
|  <p>RP6150A</p> | Low-impedance Probe  | <ul style="list-style-type: none"> <li>BW: DC to 1.5 GHz</li> <li>Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, and DS70000 series</li> </ul>                                  |
|  <p>RP1300H</p> | High-voltage Probe   | <ul style="list-style-type: none"> <li>BW: DC to 300 MHz</li> <li>CAT I 2000 V (DC+AC)</li> <li>CAT II 1500 V (DC+AC)</li> <li>Compatibility: All models of RIGOL digital oscilloscopes</li> </ul> |

| Model                                                                                        | Type                 | Description                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>RP1010H | High-voltage Probe   | <ul style="list-style-type: none"> <li>BW: DC to 40 MHz</li> <li>DC: 0 to 10 kV DC</li> <li>AC: pulse <math>\leq 20</math> kVp-p</li> <li>AC: sine <math>\leq 7</math> kV<sub>rms</sub></li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul> |
| <br>RP1018H | High-voltage Probe   | <ul style="list-style-type: none"> <li>BW: DC to 150 MHz</li> <li>DC+AC<sub>peak</sub>: 18 kV CAT II</li> <li>AC<sub>rms</sub>: 12 kV CAT II</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                                            |
| <br>RPL2316 | Logic Analyzer Probe | <ul style="list-style-type: none"> <li>Logic analyzer probe (dedicated probe for MSO2000A, MSO4000, MSO/DS7000, MSO8000, and MSO8000A series)</li> </ul>                                                                                                            |

## RIGOL Active & Current Probes

| Model                                                                                          | Type                                          | Description                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>PVA7250 | Single-ended/<br>Differential Active<br>Probe | <ul style="list-style-type: none"> <li>BW: DC to 2.5 GHz</li> <li>30 Vpp CAT I</li> <li>Compatibility: MSO/DS7000, MSO8000, MSO8000A, DHO4000, and DS70000 series.</li> </ul>                      |
| <br>RP7150  | Single-ended/<br>Differential Active<br>Probe | <ul style="list-style-type: none"> <li>BW: DC to 1.5 GHz</li> <li>30 Vpp, CAT I</li> <li>Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, DHO4000, and DS70000 series.</li> </ul> |
| <br>RP7080  | Single-ended/<br>Differential Active<br>Probe | <ul style="list-style-type: none"> <li>BW: DC to 800 MHz</li> <li>30 Vpp, CAT I</li> <li>Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, DHO4000, and DS70000 series.</li> </ul> |

| Model                                                                                          | Type                      | Description                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>RP7150S   | Single-ended Active Probe | <ul style="list-style-type: none"> <li>BW: DC to 1.5 GHz</li> <li>30 V peak CAT I</li> <li>Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, DHO4000, and DS70000 series.</li> </ul>                                                                     |
| <br>RP7080S   | Single-ended Active Probe | <ul style="list-style-type: none"> <li>BW: DC to 800 MHz</li> <li>30 V peak CAT I</li> <li>Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, DHO4000, and DS70000 series.</li> </ul>                                                                     |
| <br>RP1001C   | Current Probe             | <ul style="list-style-type: none"> <li>BW: DC to 300 kHz</li> <li>Maximum Input</li> <li>AC: <math>\pm 100</math> A</li> <li>AC P-P: 200 A</li> <li>AC RMS: 70 A</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                             |
| <br>RP1002C | Current Probe             | <ul style="list-style-type: none"> <li>BW: DC to 1 MHz</li> <li>Maximum Input</li> <li>AC: <math>\pm 70</math> A</li> <li>AC P-P: 140 A</li> <li>AC RMS: 50 A</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                                |
| <br>RP1003C | Current Probe             | <ul style="list-style-type: none"> <li>BW: DC to 50 MHz</li> <li>Maximum Input</li> <li>AC P-P: 50 A (non-continuous)</li> <li>AC RMS: 30 A</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> <li>Required to order RP1000P power supply.</li> </ul> |

| Model                                                                                          | Type                            | Description                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>RP1004C   | Current Probe                   | <ul style="list-style-type: none"> <li>BW: DC to 100 MHz</li> <li>Maximum Input</li> <li>AC P-P: 50 A (non-continuous)</li> <li>AC RMS: 30 A</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> <li>Required to order RP1000P power supply.</li> </ul>                                                |
| <br>RP1005C   | Current Probe                   | <ul style="list-style-type: none"> <li>BW: DC to 10 MHz</li> <li>Maximum Input</li> <li>AC P-P: 300 A (non-continuous), 500 A (@pulse width <math>\leq 30</math> us)</li> <li>AC RMS: 150 A</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> <li>Required to order RP1000P power supply.</li> </ul> |
| <br>RP1000P  | Power Supply                    | <ul style="list-style-type: none"> <li>Power supply for RP1003C, RP1004C, RP1005C, and RP1006C; supporting 4 channels.</li> </ul>                                                                                                                                                                                        |
| <br>RP1025D | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 25 MHz</li> <li>Max. voltage <math>\leq 1400</math> Vpp (DC + AC P-P)</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                                                                                                                       |
| <br>RP1050D | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 50 MHz</li> <li>Max. voltage <math>\leq 7000</math> Vpp (DC + AC P-P)</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                                                                                                                       |
| <br>RP1100D | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 100 MHz</li> <li>Max. voltage <math>\leq 7000</math> Vpp (DC + AC P-P)</li> <li>Compatibility: All models of RIGOLdigital oscilloscopes</li> </ul>                                                                                                                      |

# Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

## MSO8000A Series Technical Specifications

| Model                                                                             | MSO8074A                                                                                                                                                                                                                              | MSO8154A      | MSO8204A      |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------|
| Analog bandwidth (50 $\Omega$ , -3 dB) <sup>[1]</sup>                             | 750 MHz                                                                                                                                                                                                                               | 1.5 GHz       | 2 GHz         |
| Analog bandwidth (1 M $\Omega$ , -3 dB)                                           | 500 MHz                                                                                                                                                                                                                               |               |               |
| Calculated Rising Time under 50 $\Omega$<br>(half-channel mode, 10%-90%, typical) | $\leq 556$ ps                                                                                                                                                                                                                         | $\leq 269$ ps | $\leq 206$ ps |
| No. of Input/Output Channels                                                      | 4 input analog channels<br>1 input EXT channel<br>16 input digital channels (required to purchase the RPL2316 logic analyzer probe)<br>dual-channel arbitrary waveform generator output (required to purchase the MSO8000-AWG option) |               |               |
| Sampling Mode                                                                     | Real-time Sampling                                                                                                                                                                                                                    |               |               |
| Max. Sample Rate of Analog Channel                                                | Single-channel: 10 GSa/s, half-channel <sup>[2]</sup> : 5 GSa/s, full-channel: 2.5 GSa/s<br><b>NOTE:</b><br>When all the channels are enabled, the sample rate is 2.5 GSa/s, and the analog bandwidth can reach up to 1 GHz.          |               |               |
| Max. Memory Depth                                                                 | Analog channel: 500 Mpts (single-channel), 250 Mpts (half-channel <sup>[2]</sup> ), 125 Mpts (full-channel)<br>digital channel: 62.5 Mpts (full-channel)                                                                              |               |               |
| Max. Waveform Capture Rate <sup>[3]</sup>                                         | $\geq 600,000$ wfms/s                                                                                                                                                                                                                 |               |               |
| Hardware Real-time Waveform Recording and Playing                                 | $\geq 450,000$ wfms (single-channel)                                                                                                                                                                                                  |               |               |
| Peak Detection                                                                    | Capture 400 ps glitches                                                                                                                                                                                                               |               |               |
| LCD Size and Type                                                                 | 10.1-inch capacitive multi-touch screen/gesture enabled operation                                                                                                                                                                     |               |               |

| Model              | MSO8074A   | MSO8154A | MSO8204A |
|--------------------|------------|----------|----------|
| Display Resolution | 1024 × 600 |          |          |

## Vertical System Analog Channel

| Vertical System Analog Channel            |                                                                                                                                                                                        |                                                                                                 |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Input Coupling                            | DC or AC                                                                                                                                                                               |                                                                                                 |
| Input Impedance                           | 1 MΩ ± 1%, 50 Ω ± 2.5%                                                                                                                                                                 |                                                                                                 |
| Input Capacitance                         | 19 pF ± 3 pF                                                                                                                                                                           |                                                                                                 |
| Probe Attenuation Coefficient             | 0.0001X, 0.0002X, 0.0005X, 0.001X, 0.002X, 0.005X, 0.01X, 0.02X, 0.05X, 0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X, 20X, 50X, 100X, 200X, 500X, 1000X, 2000X, 5000X, 10000X, 20000X, and 50000X |                                                                                                 |
| Probe Recognition                         | Auto-recognized RIGOL's Probe                                                                                                                                                          |                                                                                                 |
| Maximum Input Voltage                     | 1 MΩ                                                                                                                                                                                   | CAT I, 300 V <sub>rms</sub> , 400 V <sub>pk</sub> ; Transient Overvoltage 1,600 V <sub>pk</sub> |
|                                           | 50 Ω                                                                                                                                                                                   | 5 V <sub>rms</sub>                                                                              |
| Vertical Sensitivity Range <sup>[4]</sup> | 1 MΩ                                                                                                                                                                                   | 1 mV/div to 10 V/div                                                                            |
|                                           | 50 Ω                                                                                                                                                                                   | 1 mV/div to 1 V/div                                                                             |
| Offset Range                              | 1 MΩ                                                                                                                                                                                   | ± 1 V (1 mV/div to 50 mV/div)                                                                   |
|                                           |                                                                                                                                                                                        | ± 30 V (51 mV/div to 260 mV/div)                                                                |
|                                           |                                                                                                                                                                                        | ± 100 V (265 mV/div to 10 V/div)                                                                |
|                                           | 50 Ω                                                                                                                                                                                   | ±1 V (1 mV/div to 100 mV/div)<br>±4 V (102 mV/div to 1 V/div)                                   |
| Dynamic Range                             | ±5 div (8 bits)                                                                                                                                                                        |                                                                                                 |
| Bandwidth Limit (Typical)                 | 1 MΩ                                                                                                                                                                                   | 20 MHz, 250 MHz; selectable for each channel                                                    |
|                                           | 50 Ω                                                                                                                                                                                   | 20 MHz                                                                                          |
| DC Gain Accuracy <sup>[4]</sup>           | ± 2% of full scale                                                                                                                                                                     |                                                                                                 |
| DC Offset Accuracy                        | >200 mV/div (±0.1 div±2 mV±1.5% of offset value)                                                                                                                                       |                                                                                                 |
|                                           | >200 mV/div (±0.1 div±2 mV±1.0% of offset value)                                                                                                                                       |                                                                                                 |

### Vertical System Analog Channel

Channel-to-Channel Isolation  $\geq 100:1$  (from DC to 1 GHz),  $\geq 30:1$  ( $> 1$  GHz)

ESD Tolerance  $\pm 8$  kV (on input BNCs)

## Vertical System Digital Channel

### Vertical System Digital Channel

|                          |                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of Channels       | 16 input channels (D0~D15)<br>(D0~D7, D8~D15)                                                                                                                                      |
| Threshold Range          | $\pm 20.0$ V, in 10 mV step                                                                                                                                                        |
| Threshold Accuracy       | $\pm (100$ mV + 3% of the threshold setting)                                                                                                                                       |
| Threshold Selection      | TTL(1.4 V), CMOS5.0(2.5 V), CMOS3.3(1.65 V), CMOS2.5(1.25 V), CMOS1.8(0.9 V), ECL(-1.3 V), PECL(3.7 V), LVDS(1.2 V), 0.0V<br>User (adjustable threshold for 8 channels in a group) |
| Max. Input Voltage       | $\pm 40$ Vpp CAT I; transient overvoltage 800 Vpk                                                                                                                                  |
| Max. Input Dynamic Range | $\pm 10$ V + threshold                                                                                                                                                             |
| Minimum Voltage Swing    | 500 mVpp                                                                                                                                                                           |
| Input Impedance          | about 101 k $\Omega$                                                                                                                                                               |
| Probe Load               | $\approx 8$ pF                                                                                                                                                                     |
| Vertical Resolution      | 1 bit                                                                                                                                                                              |

## Vertical Resolution

### Vertical Resolution

| Resolution               |           | 9 bits  | 10 bits | 11 bits  | 12 bits   |
|--------------------------|-----------|---------|---------|----------|-----------|
| Bandwidth <sup>[6]</sup> | 10 GSa/s  | 1 GHz   | 500 MHz | 250 MHz  | 125 MHz   |
|                          | 5 GSa/s   | 500 MHz | 250 MHz | 125 MHz  | 62.5 MHz  |
|                          | 2.5 GSa/s | 250 MHz | 125 MHz | 62.5 MHz | 31.25 MHz |

## Horizontal System--Analog Channel

| Horizontal System--Analog Channel     |                |                                                                               |                        |                        |
|---------------------------------------|----------------|-------------------------------------------------------------------------------|------------------------|------------------------|
| Range of Time Base                    |                | 750 MHz                                                                       | 1.5 GHz                | 2 GHz                  |
|                                       |                | 500 ps/div to 1 ks/div                                                        | 200 ps/div to 1 ks/div | 200 ps/div to 1 ks/div |
|                                       |                | Fine                                                                          |                        |                        |
| Time Base Resolution                  |                | 2 ps                                                                          |                        |                        |
| Time Base Accuracy                    |                | ±1 ppm ± 2 ppm/year                                                           |                        |                        |
| Time Base Delay Range                 | before trigger | ≥1/2 of the screen width                                                      |                        |                        |
|                                       | after trigger  | 1 s to 100 div                                                                |                        |                        |
| Time Interval (ΔT) Measurement        |                | ±(1 sample interval) ± (2 ppm×readout)±50 ps                                  |                        |                        |
| Inter-channel Offset Correction Range |                | ±100 ns                                                                       |                        |                        |
| Horizontal Mode                       | YT             | Default                                                                       |                        |                        |
|                                       | XY             | X = Channel 1, Y = Channel 2                                                  |                        |                        |
|                                       | SCAN           | Time base ≥200 ms/div, available to enter or exit the SCAN mode               |                        |                        |
|                                       | ROLL           | Time base ≥50 ms/div, available to enter or exit the ROLL mode <sup>[5]</sup> |                        |                        |

## Horizontal System--Digital Channel

| Horizontal System--Digital Channel |                                                                                                                                                                                                    |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Min. Detectable Pulse Width        | 3.2 ns                                                                                                                                                                                             |
| Maximum Input Frequency            | 500MHz (accurately copied as the sine wave of the maximum frequency of the logic square wave; input amplitude is the minimum swing; the shortest the ground cable is required for the logic probe) |
| Inter-channel Time Delay           | 1 ns (typical), 2 ns (maximum)                                                                                                                                                                     |

## Acquisition System

| Acquisition System                   |                                                                                                                                                                                                                                 |                                                                               |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Max. Sample Rate of Analog Channel   | 10 GSa/s (single-channel), 5 GSa/s (half-channel <sup>[2]</sup> ), 2.5 GSa/s (full-channel)<br><b>NOTE:</b><br>When all the channels are enabled, the sample rate is 2.5 GSa/s, and the analog bandwidth can reach up to 1 GHz. |                                                                               |
| Max. Memory Depth of Analog Channel  | 500 Mpts (single-channel), 250 Mpts (half-channel <sup>[2]</sup> ), 125 Mpts (full-channel)                                                                                                                                     |                                                                               |
| Max. Sample Rate of Digital Channel  | 1.25 GSa/s (full-channel)                                                                                                                                                                                                       |                                                                               |
| Max. Memory Depth of Digital Channel | 62.5 Mpts (full-channel)                                                                                                                                                                                                        |                                                                               |
| Acquisition Mode                     | Normal                                                                                                                                                                                                                          | Default                                                                       |
|                                      | Peak Detection                                                                                                                                                                                                                  | Captures 400 ps glitches                                                      |
|                                      | Average Mode                                                                                                                                                                                                                    | 2, 4, 8, 16...65536 are available for you to choose, averaging point by point |
|                                      | High Resolution                                                                                                                                                                                                                 | 9-12 bits                                                                     |

## Trigger System

| Trigger System   |                                                                   |                                                                            |
|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------|
| Trigger Source   | Analog channel (1~4), digital channel (D0~D15), EXT TRIG, AC Line |                                                                            |
| Trigger Mode     | Auto, Normal, Single                                              |                                                                            |
| Trigger Coupling | DC                                                                | DC coupling trigger                                                        |
|                  | AC                                                                | AC coupling trigger                                                        |
|                  | High Frequency Rejection                                          | High frequency rejection, cut-off frequency~75 kHz (internal trigger only) |
|                  | Low Frequency Rejection                                           | Low frequency rejection, cut-off frequency~75 kHz (internal trigger only)  |

## Trigger System

|                     |                                                                         |                                                                  |
|---------------------|-------------------------------------------------------------------------|------------------------------------------------------------------|
| Noise Rejection     | Increases delay for the trigger circuit (internal trigger only), On/Off |                                                                  |
| Holdoff Range       | 8 ns to 10 s                                                            |                                                                  |
| Trigger Bandwidth   | Internal Trigger                                                        | Analog Bandwidth                                                 |
|                     | External Trigger                                                        | 200 MHz                                                          |
| Trigger Sensitivity | Internal Trigger                                                        | 0.5 div, $\geq 50$ mV/div<br>enable the noise rejection, 0.7 div |
|                     | External Trigger                                                        | 200 mVpp, DC to 100 MHz<br>500 mVpp, 100 MHz to 200 MHz          |
| Trigger Level Range | Internal Trigger                                                        | $\pm 5$ div from the center of the screen                        |
|                     | External Trigger                                                        | $\pm 8$ V                                                        |
|                     | AC Line                                                                 | fixed 50%                                                        |

## Trigger Type

### Trigger Type

|              |                                                                                                                                                                                                                                                                                          |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Zone Trigger | Triggers in the rectangle area drawn manually, supporting trigger zone A and trigger zone B. The trigger conditions can be "Intersect" or "Not intersect".<br>Source channel: CH1-CH4; only one analog channel is triggered each time.                                                   |
| Trigger Type | Standard: Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, and Nth Edge trigger<br>Option: RS232/UART, I2C, SPI, CAN, FlexRay, LIN, I2S, and MIL-STD-1553 |
| Edge         | Triggers on the threshold of the specified edge of the input signal. The types can be Rising, Falling, or Either<br>Source channel: CH1-CH4, D0-D15, EXT, or AC Line                                                                                                                     |
| Pulse        | Triggers on the positive or negative pulse with a specified width. The pulse width is greater or smaller than a certain value or within a certain time range.<br>Source channel: CH1-CH4, D0-D15                                                                                         |

## Trigger Type

|            |                                                                                                                                                                                                                                                                                                                                                                          |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Slope      | <p>Triggers on the positive or negative slope of the specified time. The slew time is greater or smaller than a certain value or within a certain time range (800 ps to 10 s).</p> <p>Source channel: CH1-CH4</p>                                                                                                                                                        |
| Video      | <p>Triggers on all lines, specified line, odd field, or even field that conforms to the video standards. The supported video standards include NTSC, PAL/SECAM, 480p/60Hz, 576p/50Hz, 720p/60Hz, 720p/50Hz, 720p/30Hz, 720p/25Hz, 720p/24Hz, 1080p/60Hz, 1080p/50Hz, 1080p/30Hz, 1080p/25Hz, 1080p/24Hz, 1080i/60Hz, and 1080i/50Hz</p> <p>Source channel: CH1-CH4</p>   |
| Pattern    | <p>Identifies a trigger condition by searching for a specified pattern. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X, Rising, and Falling</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                  |
| Duration   | <p>Triggers when the specified pattern meets the specified duration condition. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, and X. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range.</p> <p>Source channel: CH1-CH4, D0-D15</p> |
| Timeout    | <p>Triggers when duration of a certain event exceeds the specified time (200 ps to 10 s). The event can be specified as Rising, Falling, or Either</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                                                                            |
| Runt       | <p>Triggers when the pulses pass through one threshold but fail to pass through another threshold. The channel only supports analog channels</p> <p>Source channel: CH1-CH4</p>                                                                                                                                                                                          |
| Window     | <p>Triggers in a specified window state when the rising edge of the signal crosses the upper threshold or the falling edge crosses the lower threshold. The window state can be Enter, Exit, or Time</p> <p>Source channel: CH1-CH4</p>                                                                                                                                  |
| Delay      | <p>Triggers when the time difference between the specified edges of Source A and Source B meets the preset time. Delay is greater or smaller than a certain value, or within a certain time range, or outside a certain time range.</p> <p>Source channel: D0-D15</p>                                                                                                    |
| Setup/Hold | <p>When the setup time or hold time between the input clock signal and the data signal is smaller than the specified time (8 ns~10 s).</p> <p>Source channel: CH1-CH4</p>                                                                                                                                                                                                |
| Nth Edge   | <p>Triggers on the Nth edge that appears after the specified idle time. The edge can be specified as Rising or Falling</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                                                                                                        |

| Trigger Type          |                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RS232/UART (Option)   | <p>MSO8000-COMP option</p> <p>Triggers on the Start, Error, Check Error, or Data frame of the RS232/UART bus (up to 20 Mb/s).</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                                                                                                       |
| I2C (Option)          | <p>MSO8000-EMBD option</p> <p>Triggers on the Start, Stop, Restart, MissedACK, Address (7 bits, 8 bits, or 10 bits), Data, or Address Data of the I2C bus.</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                                                                          |
| SPI (Option)          | <p>MSO8000-EMBD option</p> <p>Triggers on the specified pattern of the specified data width (4~32) of SPI bus. CS and Timeout are supported</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                                                                                         |
| CAN (Option)          | <p>MSO8000-AUTO option</p> <p>Triggers on the start of a frame, end of a frame, Remote ID, Overload, Frame ID, Frame Data, Data&amp;ID, Frame Error, Bit Fill, Answer Error, Check Error, Format Error, and Random Error of the CAN signal (up to 5Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF.</p> <p>Source channel: CH1-CH4, D0-D15</p> |
| FlexRay (Option)      | <p>MSO8000-FLEX option</p> <p>Triggers on the specified position (TSS End, FSS_BSS End, FES End, DTS End), frame (null, Sync, Start, All), symbol (CAS/MTS and WUS), error (Head CRC Err, Tail CRC Err, Decode Err, and Random Err) of the FlexRay signal (up to 10 Mb/s).</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                          |
| LIN (Option)          | <p>MSO8000-AUTO option</p> <p>Triggers on the Sync, ID, Data (length settable), Data&amp;ID, Wakeup, Sleep, and Error frame of the LIN bus signal (up to 20 Mb/s).</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                                                                  |
| I2S (Option)          | <p>MSO8000-AUDIO option</p> <p>Triggers on 2's complement data of audio left channel, right channel, or either channel (=, ≠, &gt;, &lt;, &lt;&gt;, &gt;&lt;). The available alignment modes include I2S, LJ, and RJ</p> <p>Source channel: CH1-CH4, D0-D15</p>                                                                                                                |
| MIL-STD-1553 (Option) | <p>MSO8000-AERO option</p> <p>Triggers on Sync (Data Sync, Cmd/Status Sync, and All Sync), Data, RTA, RTA +11Bit, and Error (Sync Error and Check Error) of the MIL-STD-1553 bus.</p> <p>Source channel: CH1-CH4</p>                                                                                                                                                           |

## Search&Navigation

### Search, Navigation, and Table

|                |                                                                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Type           | Edge, Pulse, Runt, Slope, RS232, I2C, and SPI                                                                                                       |
| Source         | Any analog channel                                                                                                                                  |
| Copy           | Copies the search settings to the trigger settings, and copies from the trigger settings                                                            |
| Result Display | Event table or navigation. Goes to the specific event through the event table index                                                                 |
| Navigation     | Memory playing: views the memory waveforms with the navigation keys by scrolling through stored waveform data, supporting viewing at three speeds.  |
|                | ZOOM playing: views the details of waveforms with the navigation keys by panning the ZOOM window automatically, supporting viewing at three speeds. |
|                | Recording playback: plays back the recorded waveforms with the navigation keys.                                                                     |
|                | Event navigation: uses the navigation keys to scroll through the event search results.                                                              |

## Waveform Measurement

### Waveform Measurement

|        |                   |                                                                                                                              |
|--------|-------------------|------------------------------------------------------------------------------------------------------------------------------|
| Cursor | Number of Cursors | 2 pairs of XY cursors                                                                                                        |
|        | Manual Mode       | Voltage deviation between cursors ( $\Delta Y$ )                                                                             |
|        |                   | Time deviation between cursors ( $\Delta X$ )                                                                                |
|        |                   | Reciprocal of $\Delta X$ (Hz) ( $1/\Delta X$ )                                                                               |
|        | Track Mode        | Fix Y-axis to track X-axis waveform point's voltage and time values                                                          |
|        |                   | Fix X-axis to track Y-axis waveform point's voltage and time values                                                          |
|        | Auto Measurement  | Allows to display cursors during auto measurement                                                                            |
|        | XY Mode           | Measures the voltage parameters of the corresponding channel waveforms in XY time base mode.<br>X = Channel 1, Y = Channel 2 |

## Waveform Measurement

|                  |                        |                                                                                                                                                                                                    |
|------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Auto Measurement | Number of Measurements | 41 auto measurements; and up to 10 measurements can be displayed at a time.                                                                                                                        |
|                  | Measurement Source     | CH1-CH4, Math1-Math4, D0-D15                                                                                                                                                                       |
|                  | Measurement Mode       | Normal and Precision (full-memory hardware measurement)                                                                                                                                            |
|                  | Measurement Range      | Main, Zoom, and Cursor                                                                                                                                                                             |
|                  | All Measurement        | Display 33 measurement items for the current measurement channel; the measurement results are updated continuously; you can switch the measurement channel.                                        |
|                  | Vertical               | Vmax, Vmin, Vpp, Vtop, Vbase, Vamp, Vupper, Vmid, Vlower, Vavg, VRMS, Per. VRMS, Overshoot, Preshoot, Area, Period Area, and Std Dev.                                                              |
|                  | Horizontal             | Period, Frequency, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Positive Pulse Count, Negative Pulse Count, Rising Edge Count, Falling Edge Count, Tvmax, Tvmin, +Slew Rate, and -Slew Rate |
|                  | Others                 | Delay(A↑-B↑), Delay(A↑-B↓), Delay(A↓-B↑), Delay(A↓-B↓), Phase(A↑-B↑), Phase(A↑-B↓), Phase(A↓-B↑), and Phase(A↓-B↓)                                                                                 |
|                  | Analysis               | Frequency counter, DVM, power analysis (option), histogram, zone trigger, eye diagram (option), and jitter analysis (option)                                                                       |
|                  | Statistics             | Items: Current, Average, Max, Min, Standard Deviation, Count<br>Statistical times settable                                                                                                         |

## Waveform Calculation

### Waveform Calculation

|                       |                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| No. of Math Functions | 4, 4 math functions available to be displayed at one time                                                                         |
| Operation             | A+B, A-B, A×B, A/B, FFT, A&&B, A  B, A^B, !A, Intg, Diff, Sqrt, Lg, Ln, Exp, Abs, AX+B, LowPass, HighPass, BandPass, and BandStop |

## Waveform Calculation

|              |                       |                                                                                               |
|--------------|-----------------------|-----------------------------------------------------------------------------------------------|
| Color Grade  | Supports Math and FFT |                                                                                               |
| Enhanced FFT | Record Length         | Max. 1 Mpts                                                                                   |
|              | Window Type           | Rectangular, Blackman-Harris, Hanning (default), Hamming, Flattop, and Triangle.              |
|              | Peak Search           | A maximum of 15 peaks, determined by the settable threshold and offset threshold set by users |

## Waveform Analysis

### Waveform Analysis

|                    |          |                                                                                                                                                                                                                                                |
|--------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Waveform Recording |          | Stores the signal under test in segments according to the trigger events, i.g. saves all the sampled waveform data as a segment to the RAM for each trigger event. The maximum number of the sampled segments reaches 450,000.                 |
|                    | Source   | All enabled analog channels and digital channels                                                                                                                                                                                               |
|                    | Analysis | Supports playing frame by frame or continuous playing; capable of calculating, measuring, and decoding the played waveforms                                                                                                                    |
| Pass/Fail Test     |          | Compares the signal under test with the user-defined mask to provide the test results: the number of successful tests, failed tests, and the total number of tests. The pass/fail event can enable immediate stop, beeper, and the screenshot. |
|                    | Source   | Any analog channel                                                                                                                                                                                                                             |

## Waveform Analysis

|                                       |                      |                                                                                                                                                                                                                                                           |
|---------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                       |                      | The waveform histogram provides a group of data, showing the number of times a waveform hits within the defined region range on the screen. The waveform histogram not only shows the distribution of hits, but also the ordinary measurement statistics. |
| Histogram                             | Source               | Any analog channel, eye diagram, auto measurement item, or jitter measurement                                                                                                                                                                             |
|                                       | Type                 | Horizontal, vertical, and measure                                                                                                                                                                                                                         |
|                                       | Measure              | Sum, Peaks, Max, Min, Pk_Pk, Mean, Median, Mode, Bin width, Sigma, and XScale                                                                                                                                                                             |
|                                       | Mode                 | Supports all modes, except the Zoom, XY, and ROLL modes                                                                                                                                                                                                   |
| Color Grade                           |                      | Provides a 3D view for color grade waveforms                                                                                                                                                                                                              |
|                                       | Source               | Any analog channel                                                                                                                                                                                                                                        |
|                                       | Color Theme          | Temperature and Intensity                                                                                                                                                                                                                                 |
|                                       | Mode                 | Supports all modes                                                                                                                                                                                                                                        |
| Real-time Eye Diagram (JITTER Option) |                      | Makes measurements for the clock or data signal over time, analyze the variance of the technical specifications.                                                                                                                                          |
|                                       | Source               | Any analog channel                                                                                                                                                                                                                                        |
|                                       | Clock Recovery       | Constant clock, first-order PLL, second-order PLL, and explicit clock                                                                                                                                                                                     |
|                                       | Type                 | Fully automatic, semi automatic, and manual                                                                                                                                                                                                               |
|                                       | Eye Measurement Item | one level, zero level, eye height, eye width, eye amplitude, crossing percentage, Q Factor                                                                                                                                                                |

## Waveform Analysis

|                                    |                     |                                                                                                                  |
|------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------|
| Jitter Analysis<br>(JITTER option) |                     | Makes measurements for the clock or data signal over time, analyze the variance of the technical specifications. |
|                                    | Source              | Any analog channel                                                                                               |
|                                    | Clock Recovery      | Constant clock, first-order PLL, second-order PLL, and explicit clock                                            |
|                                    | Type                | Fully automatic, semi automatic, and manual                                                                      |
|                                    | Jitter Measurement  | TIE, Cycle to Cycle, +Width to +Width, and –Width to -Width                                                      |
|                                    | Measurement Display | Meas trend, meas histogram                                                                                       |

## Serial Decoding

### Serial Decoding

|                     |                                                                                                                                                                                                   |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of Decodings | 4, four protocol types can be decoded and enabled at the same time                                                                                                                                |
| Decoding Type       | Standard: Parallel<br>Option: RS232/UART, I2C, SPI, LIN, CAN, CAN-FD, FlexRay, I2S, and MIL-STD-1553                                                                                              |
| Parallel            | Up to 20 bits of Parallel decoding, supporting the combination of any analog channel and digital channel. Supports user-defined clock and auto clock settings.<br>Source channel: CH1-CH4, D0-D15 |
| RS232/UART          | MSO8000-COMP option<br>Decodes the RS232/UART (up to 20 Mb/s) bus's TX/RX data (5-9 bits), parity (Odd, Even, or None), and stop bits (1-2 bits).<br>Source channel: CH1-CH4, D0-D15              |
| I2C                 | MSO8000-EMBD option<br>Decodes the address (with or without the R/W bit), data, and ACK of the I2C bus.<br>Source channel: CH1-CH4, D0-D15                                                        |

## Serial Decoding

|              |                                                                                                                                                                                                                                                            |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SPI          | MSO8000-EMBD option                                                                                                                                                                                                                                        |
|              | Decodes the MISO/MOSI data (4-32 bits) of the SPI bus. CS and Timeout are supported                                                                                                                                                                        |
|              | Source channel: CH1-CH4, D0-D15                                                                                                                                                                                                                            |
| LIN          | MSO8000-AUTO option                                                                                                                                                                                                                                        |
|              | Decodes the protocol version (1.X or 2.X) of the LIN bus (up to 20 Mb/s). The decoding displays sync, ID, data, and check sum.                                                                                                                             |
|              | Source channel: CH1-CH4, D0-D15                                                                                                                                                                                                                            |
| CAN          | MSO8000-AUTO option                                                                                                                                                                                                                                        |
|              | Decodes the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN bus (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF. |
|              | Support 10 Mb/s CAN-FD baud.                                                                                                                                                                                                                               |
|              | Source channel: CH1-CH4, D0-D15                                                                                                                                                                                                                            |
| FlexRay      | MSO8000-FLEX option                                                                                                                                                                                                                                        |
|              | Decodes the frame ID, PL (payload), Header CRC, Cycle Count, Data, Tail CRC, and DTS of the FlexRay bus (up to 10 Mb/s). The supported signal types include BP, BM, and RX/TX.                                                                             |
|              | Source channel: CH1-CH4, D0-D15                                                                                                                                                                                                                            |
| I2S          | MSO8000-AUDIO option                                                                                                                                                                                                                                       |
|              | Decodes I2S audio bus left channel data and right channel data, supporting 4-32 bits. The available alignment modes include I2S, and and RJ                                                                                                                |
|              | Source channel: CH1-CH4, D0-D15                                                                                                                                                                                                                            |
| MIL-STD-1553 | MSO8000-AERO option                                                                                                                                                                                                                                        |
|              | Decodes the MIL-STD-1553 bus signal's data word, command word, and status word (address+last 11 bits).                                                                                                                                                     |
|              | Source channel: CH1-CH4                                                                                                                                                                                                                                    |

## Auto

### Auto

|           |                                                                       |
|-----------|-----------------------------------------------------------------------|
| AutoScale | Min voltage greater than 10 mVpp, duty cycle 1%, frequency over 35 Hz |
|-----------|-----------------------------------------------------------------------|

## Arbitrary Waveform Generator

### Arbitrary Waveform Generator (technical specifications are typical values) (option)

|                     |                                                          |                             |
|---------------------|----------------------------------------------------------|-----------------------------|
| Number of Channels  | 2                                                        |                             |
| Output Mode         | Normal (2-channel output)                                |                             |
| Sample Rate         | 200 MSa/s                                                |                             |
| Vertical Resolution | 14 bits                                                  |                             |
| Max. Frequency      | 25 MHz                                                   |                             |
| Standard Waveform   | Sine, Square, Ramp, Pulse, DC, Noise                     |                             |
| Built-in Waveform   | Sinc, Exp.Rise, Exp.Fall, ECG, Gauss, Lorentz, Haversine |                             |
| Sine                | Frequency Range                                          | 100 mHz to 25 MHz           |
|                     | Flatness                                                 | ±0.5 dB (relative to 1 kHz) |
|                     | Harmonic Distortion                                      | -40 dBc                     |
|                     | Spurious (non-harmonics)                                 | -40 dBc                     |
|                     | Total Harmonic Distortion                                | 1%                          |
|                     | S/N Ratio                                                | 40 dB                       |

## Arbitrary Waveform Generator (technical specifications are typical values) (option)

|                    |                                                         |                                                       |
|--------------------|---------------------------------------------------------|-------------------------------------------------------|
| Square/Pulse       | Frequency Range                                         | Square: 100 mHz to 15 MHz                             |
|                    |                                                         | Pulse: 100 mHz to 1 MHz                               |
|                    | Rise/Fall Time                                          | <15 ns                                                |
|                    | Overshoot                                               | <20%                                                  |
|                    | Duty                                                    | Square: always 50%                                    |
|                    |                                                         | Pulse: 2% to 98%, adjustable                          |
|                    | Duty Cycle Resolution                                   | 1% or 10 ns (whichever is greater)                    |
|                    | Min. Pulse Width                                        | 20 ns                                                 |
|                    | Pulse Width Resolution                                  | 5 ns                                                  |
|                    | Jitter                                                  | 5 ns                                                  |
| Ramp               | Frequency Range                                         | 100 mHz to 100 kHz                                    |
|                    | Linearity                                               | 1%                                                    |
|                    | Symmetry                                                | 1% to 100%                                            |
| Noise              | Bandwidth                                               | >25 MHz                                               |
| Built-in Waveform  | Frequency Range                                         | 100 mHz to 1 MHz                                      |
| Arbitrary Waveform | Frequency Range                                         | 100 mHz to 10 MHz                                     |
|                    | Waveform Length                                         | 2 to 16 kpts                                          |
|                    | Supports loading channel waveforms and stored waveforms |                                                       |
| Frequency          | Accuracy                                                | 100 ppm (<10 kHz), 50 ppm (>10 kHz)                   |
|                    | Resolution                                              | 100 mHz or 4 bits (whichever is greater)              |
| Amplitude          | Output Range                                            | 20 mVpp~5 Vpp (HighZ), 10 mVpp~2.5 Vpp (50 $\Omega$ ) |
|                    | Resolution                                              | 100 $\mu$ V or 3 bits (whichever is greater)          |
|                    | Accuracy                                                | $\pm$ (2% of setting + 1 mV) (Frequency=1 kHz)        |

**Arbitrary Waveform Generator (technical specifications are typical values) (option)**

|            |                                   |                                                          |
|------------|-----------------------------------|----------------------------------------------------------|
| DC Offset  | Range                             | $\pm 2.5$ V (HighZ), $\pm 1.25$ V (50 $\Omega$ )         |
|            | Resolution                        | 100 $\mu$ V or 3 bits (whichever is greater)             |
|            | Accuracy                          | $\pm(2\%$ of offset setting+5 mV+0.5% of amplitude)      |
| Modulation | AM                                | Modulating Waveforms: Sine, Square, Triangle, and Noise. |
|            |                                   | Modulation Frequency: 1 Hz to 50 kHz                     |
|            |                                   | Modulation Depth: 0% to 120%                             |
|            | FM                                | Modulating Waveforms: Sine, Square, Triangle, and Noise. |
|            |                                   | Modulation Frequency: 1 Hz to 50 kHz                     |
|            |                                   | Modulation Offset: 1 Hz to carrier frequency             |
|            | FSK                               | Modulating Waveforms: 50% duty cycle square              |
|            |                                   | Modulation Frequency: 1 Hz to 50 kHz                     |
|            |                                   | Hopping Frequency: 100 mHz to max. carrier frequency     |
| Sweep      | Linear, Log, and Step             |                                                          |
|            | Sweep Time                        | 1 ms to 500 s                                            |
|            | Start Frequency and End Frequency | Any frequencies within the waveform range                |
| Burst      | N Cycle, Infinite                 |                                                          |
|            | Cycle Count                       | 1 to 1000000                                             |
|            | Burst Period                      | 1 $\mu$ s to 500 s                                       |
|            | Burst Delay                       | 0 s to 500 s                                             |
|            | Trigger Source                    | Internal, Manual                                         |

## Digital Voltmeter

**Digital Voltmeter (technical specifications are typical values)**

|                   |                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------------------|
| Source            | Any analog channel                                                                                           |
| Function          | DC, AC+DC <sub>RMS</sub> , AC <sub>RMS</sub>                                                                 |
| Resolution        | ACV/DCV: 3 digits                                                                                            |
| Limits Beeper     | Sounds an alarm when the voltage value is within or outside of the limit range.                              |
| Range Measurement | Displays the latest measurement results in the diagram, and displays the extremities for the first 3 seconds |

## High-Precision Frequency Counter

### High-Precision Frequency Counter

|                |                                              |                                                      |
|----------------|----------------------------------------------|------------------------------------------------------|
| Source         | Any analog channel, digital channel, and EXT |                                                      |
| Measure        | Frequency, period, totalizer                 |                                                      |
| Counter        | Resolution                                   | Max. 6 bits, user-defined                            |
|                | Max. Frequency                               | Max. analog bandwidth or 2.5 GHz (whichever is less) |
| Totalizer      | 48-bit totalizer                             |                                                      |
|                | Edge                                         | Counts the number of the rising edges                |
| Time Reference | Internal Reference                           |                                                      |

## Customization for Quick Key

### Customization for Quick Key

|                           |                                                                                                                         |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Quick Screenshot          | Quickly saves the screen image to the specified path based on the current image storage menu settings.                  |
| Quick Waveform Save       | Quickly saves the screen or memory waveforms to the specified path based on the current waveform storage menu settings. |
| Quick Save Settings       | Quickly saves the setup file to the specified path based on the current setup storage menu settings.                    |
| Quick All Measurement     | Displays all the prompt message windows for all the measurement of the waveforms.                                       |
| Quick Reset of Statistics | Quickly resets all the measurement statistics data and measurement counts.                                              |
|                           | Quickly resets all the statistics information in PassFail function                                                      |
| Quick Waveform Recording  | Quickly starts or stops the waveform recording                                                                          |
| Quickly Email Sending     | Quickly sends the email based on the set email address.                                                                 |
| Quick Print               | Quickly performs the print operation based on the current printer settings.                                             |
| Quick Group Saving        | Quickly performs the group saving operation based on the currently selected item for saving                             |

## Command Set

| Command Set                     |                    |
|---------------------------------|--------------------|
| Common Commands Support         | IEEE488.2 Standard |
| Error Message Definition        | Error messages     |
| Support Status Report Mechanism | Status reporting   |
| Support Syn Mechanism           | Synchronization    |

## Display

| Display     |                                                                   |
|-------------|-------------------------------------------------------------------|
| LCD         | 10.1-inch capacitive multi-touch screen/gesture enabled operation |
| Resolution  | 1024×600 (Screen Region)                                          |
| Graticule   | (10 horizontal divisions) x (8 vertical divisions)                |
| Persistence | Off, Infinite, variable persistence (100 ms to 10 s)              |
| Brightness  | 256 intensity levels (LCD, HDMI)                                  |

## I/O

| I/O                          |                                                                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB 2.0 Hi-speed Host Port   | 4 (3 on the front panel and 1 on the rear panel)                                                                                                      |
| USB 2.0 Hi-speed Device Port | 1 on the rear panel, compatible with USB Test and Measurement Class (USBTMC)                                                                          |
| LAN                          | 1 on the rear panel, 10/100/1000-port, supporting LXI-C                                                                                               |
| GPIB Interface               | GPIB-USB adaptor (opt.)                                                                                                                               |
| Web Remote Control           | Supports Web Control interface (input the IP address of the oscilloscope into the Web browser to display the operation interface of the oscilloscope) |

## I/O

|                           |                                                                                                  |                                                                                                                                |
|---------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| AUX Out                   | BNC output on the rear panel.                                                                    |                                                                                                                                |
|                           | $V_o(H) \geq 2.5\text{ V}$ open circuit, $\geq 1.0\text{ V}$ $50\ \Omega$ to GND                 |                                                                                                                                |
|                           | $V_o(L) \leq 0.7\text{ V}$ to load $\leq 4\text{ mA}$ , $\leq 0.25\text{ V}$ $50\ \Omega$ to GND |                                                                                                                                |
|                           | Trigger Output                                                                                   | Outputs a pulse signal when the oscilloscope is triggered                                                                      |
| 10 M In/Out               | Pass/Fail                                                                                        | Outputs a pulse signal when a pass/fail event occurs.<br>Supports user-defined pulse polarity and pulse time (100 ns to 10 ms) |
|                           | 1, BNC connector on the rear panel                                                               |                                                                                                                                |
|                           | Support Mode                                                                                     | Output/input off; output on (10 MHz output); input on (10 MHz input)                                                           |
|                           | Input Mode                                                                                       | $50\ \Omega$ , with the amplitude 130 mVpp to 4.1 Vpp (-10 dBm, 20 dBm), the input accuracy $10\text{ MHz} \pm 10\text{ ppm}$  |
| HDMI Video Output         | Output Mode                                                                                      | $50\ \Omega$ , 1.5 Vpp sine waveform                                                                                           |
|                           | 1 on the rear panel, HDMI 1.4b, A plug. Used to connect to an external monitor or projector      |                                                                                                                                |
| Probe Compensation Output | Freq 1 kHz, 3 Vpp square waveform                                                                |                                                                                                                                |

## Power

### Power

|               |                                                                |
|---------------|----------------------------------------------------------------|
| Power Voltage | 100 V-240 V, 45 Hz-440 Hz                                      |
| Power         | Max. 200 W (connect to various interfaces, USB, active probes) |
| Fuse          | 3.15 A, T degree, 250 V                                        |

## Environment

### Environment

|                   |               |                                                |
|-------------------|---------------|------------------------------------------------|
| Temperature Range | Operating     | $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$   |
|                   | Non-operating | $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$ |

## Environment

|                |               |                                                |
|----------------|---------------|------------------------------------------------|
| Humidity Range | Operating     | below +30°C: ≤90% RH (without condensation)    |
|                |               | +30°C to +40°C, ≤75% RH (without condensation) |
|                |               | +40°C to +50°C, ≤45% RH (without condensation) |
|                | Non-operating | below 65°C: ≤90% RH (without condensation)     |
| Altitude       | Operating     | below 3,000 meters                             |
|                | Non-operating | below 15,000 meters                            |

## Warranty and Calibration Interval

### Warranty and Calibration Interval

|                                  |                                                                      |
|----------------------------------|----------------------------------------------------------------------|
| Warranty                         | Three years for the mainframe, excluding the probes and accessories. |
| Recommended Calibration Interval | 18 months                                                            |

## Regulations

| Regulations                   |                                                                                                                                                    |                                                                                                                                     |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Electromagnetic Compatibility | Compliant with EMC DIRECTIVE 2014/30/EU, compliant with or higher than the standards specified in IEC 61326-1:2013/EN 61326-1:2013 Group 1 Class A |                                                                                                                                     |
|                               | CISPR 11/EN 55011                                                                                                                                  |                                                                                                                                     |
|                               | IEC 61000-4-2:2008/EN 61000-4-2                                                                                                                    | ±4.0 kV (contact discharge), ±8.0 kV (air discharge)                                                                                |
|                               | IEC 61000-4-3:2002/EN 61000-4-3                                                                                                                    | 3 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)                                                       |
|                               | IEC 61000-4-4:2004/EN 61000-4-4                                                                                                                    | 1 kV power line                                                                                                                     |
|                               | IEC 61000-4-5:2001/EN 61000-4-5                                                                                                                    | 0.5 kV (phase-to-neutral voltage); 1 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)                                   |
|                               | IEC 61000-4-6:2003/EN 61000-4-6                                                                                                                    | 3 V, 0.15-80 MHz                                                                                                                    |
| Safety                        | IEC 61000-4-11:2004/EN 61000-4-11                                                                                                                  | Voltage dip: 0% UT during half cycle; 0% UT during 1 cycle ; 70% UT during 25 cycles<br>short interruption: 0% UT during 250 cycles |
|                               | EN 61010-1:2019                                                                                                                                    |                                                                                                                                     |
|                               | EN 61010-031:2015                                                                                                                                  |                                                                                                                                     |
|                               | IEC 61010-1:2016                                                                                                                                   |                                                                                                                                     |
|                               | IEC 61010-2-030:2017                                                                                                                               |                                                                                                                                     |
|                               | UL 61010-1:2012 R7                                                                                                                                 |                                                                                                                                     |
|                               | UL 61010-2-31:2017 R2                                                                                                                              |                                                                                                                                     |
|                               | CAN/CSA-22.2 No. 61010-1-12:2017                                                                                                                   |                                                                                                                                     |
|                               | CAN/CSA-22.2 No. 61010-2-30:2018                                                                                                                   |                                                                                                                                     |
|                               | CAN/CSA-22.2 No. 61010-031-07:201                                                                                                                  |                                                                                                                                     |
| Vibration                     | Meets GB/T 6587; class 2 random                                                                                                                    |                                                                                                                                     |
|                               | Meets MIL-PRF-28800F and IEC60068-2-6; class 3 random                                                                                              |                                                                                                                                     |

## Regulations

|       |                                                                                                                     |
|-------|---------------------------------------------------------------------------------------------------------------------|
| Shock | Meets GB/T 6587-2012; class 2 random                                                                                |
|       | Meets MIL-PRF-28800F and IEC 60068-2-27; class 3 random                                                             |
|       | In non-operating conditions: 30 g, half-sine wave, 11 ms duration, 3 shocks along the main axis, total of 18 shocks |

## Mechanical Characteristics

### Mechanical Characteristics

|                           |                                      |
|---------------------------|--------------------------------------|
| Dimensions <sup>[7]</sup> | 410 mm (W) x 224 mm (H) x 135 mm (D) |
|---------------------------|--------------------------------------|

|                |    |
|----------------|----|
| Rack Mount Kit | 6U |
|----------------|----|

|                       |                           |
|-----------------------|---------------------------|
| Weight <sup>[8]</sup> | Package excluded: <4.0 kg |
|                       | Package included: <9.2 kg |

## Non-volatile Memory

### Non-volatile Memory

|                    |                                                                            |                                                                                                                                                                       |
|--------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data/File Storage  | Setup/Image                                                                | setup (*.stp), image (*.png, *.bmp, *.tif, *.jpg)                                                                                                                     |
|                    | Waveform Data                                                              | CSV waveform data (*.csv), binary waveform data (*.bin, *.wfm), list data (*.csv), reference waveform data (*.ref, *.csv, *.bin), and arbitrary waveform data (*.arb) |
| Reference Waveform | Displays 10 internal waveforms, and its storage is limited by the capacity |                                                                                                                                                                       |
| Setting            | Storage is limited by the capacity                                         |                                                                                                                                                                       |
| USB Capacity       | Supports the USB storage device that conforms to the industry standard     |                                                                                                                                                                       |

### NOTE:

[1]: 2 GHz bandwidth model is only applicable to the single-channel and half-channel modes. The three bandwidths are available when the scale is 5mV/div or above.

[2]: Half-channel mode: CH1 and CH2 are considered as a group; CH3 and CH4 are considered as another group. Each group share the sample rate of 5 GSa/s, and either one of the channels in each group is enabled.

[3]: Maximum value. single-channel, 10 ns horizontal time base, Auto memory depth, sine wave signal with input amplitude 4 div and 10 MHz frequency. Others are default settings.

[4]: 1 mV/div and 2 mV/div are a magnification of 4 mV/div setting. For vertical accuracy calculations, use full scale of 32 mV for 1 mV/div and 2 mV/div sensitivity setting.

[5]: You need to press  > **More** > **Auto ROLL** to enable the ROLL mode.

[6]: The bandwidth changes with the time base scale and channel mode. The bandwidth listed in this manual is the maximum approximate bandwidth in different modes.

[7]: Supporting legs and handle folded, knob height included, front protective cover excluded.

[8]: MSO8000A, standard configuration.

# Order Information and Warranty Period

## Order Information

| Order Information                                                | Order No.           |
|------------------------------------------------------------------|---------------------|
| <b>Model</b>                                                     |                     |
| 2 GHz, 10 GSa/s, 500 Mpts, 4+16 CH MSO                           | MSO8204A            |
| 1.5 GHz, 10 GSa/s, 500 Mpts, 4+16 CH MSO                         | MSO8154A            |
| 750 MHz, 10 GSa/s, 500 Mpts, 4+16 CH MSO                         | MSO8074A            |
| <b>Standard Accessories</b>                                      |                     |
| USB Cable                                                        | CB-USBA-USBB-FF-150 |
| Passive HighZ Probe x4 (500 MHz)                                 | RP3500A             |
| MSO8204A: Passive Low-impedance Probe x2 (1.5 GHz)               | RP6150A             |
| MSO8154A: Passive Low-impedance Probe x2 (1.5 GHz)               |                     |
| Front Protective Cover                                           | MSO8000-FPC         |
| Power Cord Conforming to the Standard of the Destination Country | -                   |
| <b>Recommended Accessories</b>                                   |                     |
| 16-channel Logic Analyzer Probe                                  | RPL2316             |
| Active Single-ended/Differential Probe (2.5 GHz BW)              | PVA7250             |
| Active Differential Probe (1.5 GHz BW)                           | RP7150              |
| Active Differential Probe (800 MHz BW)                           | RP7080              |
| Active Single-ended Probe (1.5 GHz BW)                           | RP7150S             |
| Active Single-ended Probe (800 MHz BW)                           | RP7080S             |
| Rack Mount Kit                                                   | RM6041              |
| Near-field Probe                                                 | NFP-3               |
| Power Analysis Phase Difference Correction Jig                   | RPA246              |
| Digital Oscilloscope Demonstration Plate                         | DK-DS6000           |
| USB-GPIB Adaptor                                                 | USB-GPIB            |
| <b>Bandwidth Upgrade Option</b>                                  |                     |
| Bandwidth upgrades from 750 MHz to 1.5 GHz                       | MSO8000A-BW7T15     |
| Bandwidth upgrades from 750 GHz to 2 GHz                         | MSO8000A-BW7T20     |
| Bandwidth upgrades from 1.5 GHz to 2 GHz                         | MSO8000A-BW15T20    |
| Single-Channel 3 GHz Bandwidth Upgrade Option                    | MSO8000A-BW20T30    |
| <b>Bundle Option</b>                                             |                     |

| Order Information                                                                                                                                                                  | Order No.      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Function and application bundle option, including MSO8000-COMP, MSO8000-EMBD, MSO8000-AUTO, MSO8000-FLEX, MSO8000-AUDIO, MSO8000-AERO, MSO8000-AWG, MSO8000-JITTER and MSO8000-PWR | MSO8000-BND    |
| <b>Serial Protocol Analysis Option</b>                                                                                                                                             |                |
| PC Serial Bus Trigger and Analysis (RS232/UART)                                                                                                                                    | MSO8000-COMP   |
| Embedded Serial Bus Trigger and Analysis (I2C, SPI)                                                                                                                                | MSO8000-EMBD   |
| Auto serial bus trigger and analysis (CAN, CAN-FD, LIN)                                                                                                                            | MSO8000-AUTO   |
| FlexRay serial bus trigger and analysis (FlexRay)                                                                                                                                  | MSO8000-FLEX   |
| Audio Serial Bus Trigger and Analysis (I2S)                                                                                                                                        | MSO8000-AUDIO  |
| MIL-STD-1553 Bus Trigger and Analysis (MIL-STD-1553)                                                                                                                               | MSO8000-AERO   |
| <b>Measurement Application Option</b>                                                                                                                                              |                |
| Dual-channel 25 MHz Arbitrary Waveform Generator                                                                                                                                   | MSO8000-AWG    |
| Built-in Power Analysis (Required to Purchase the RPA246 Phase Deviation Correction Jig)                                                                                           | MSO8000-PWR    |
| Real-time Eye Diagram and Jitter Analysis (Option)                                                                                                                                 | MSO8000-JITTER |


#### NOTE:

For all the accessories and options, please contact the local office of RIGOL.

## Warranty Period

Three years for the mainframe, excluding the probes and accessories.

# Option Ordering and Installation Process

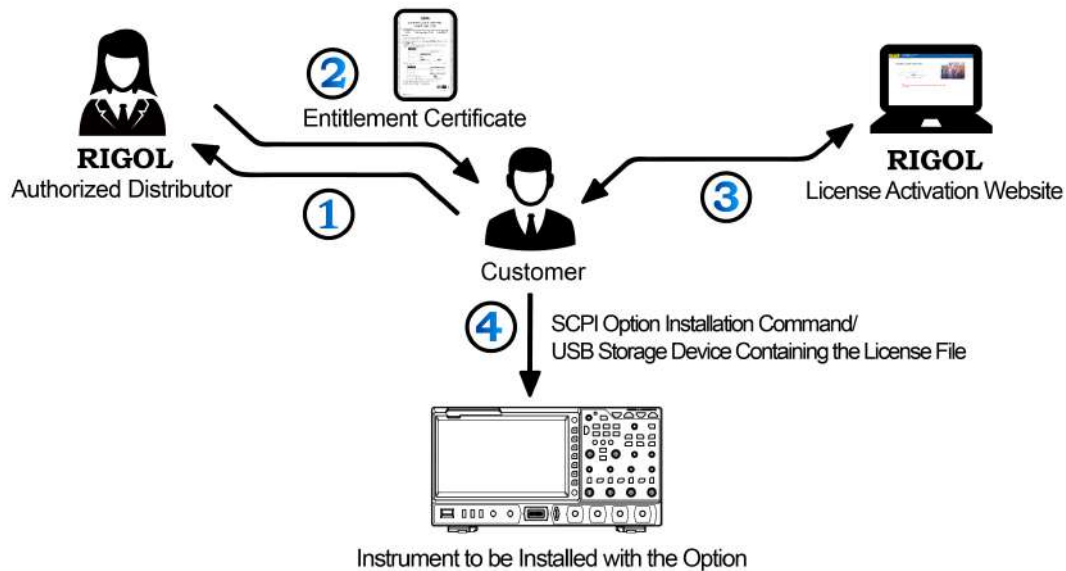


1. According to the usage requirements, please purchase the specified function options from **RIGOL Sales Personnel**, and provide the serial number of the instrument that needs to install the option.
2. After receiving the option order, the **RIGOL** factory will mail the paper software product entitlement certificate to the address provided in the order.
3. Log in to **RIGOL** official website for registration. Use the software key and instruments serial number provided in the entitlement certificate to obtain the option license code and the option license file.
4. Download the option license file to the root directory of the USB storage device, and connect the USB storage device to the instrument properly. After the USB storage device is successfully recognized, the **Option install** menu is activated. Press this menu key to start installing the option.

# Boost Smart World and Technology Innovation

Industrial Intelligent  
Manufacturing



Semiconductors



Education &  
Research



Communication

System Integration



New Energy



- 5G Cellular-5G/WIFI
- UWB/RFID/ ZIGBEE
- Digital Bus/Ethernet
- Optical Communication

- Digital/Analog/RF Chip
- Memory and MCU Chip
- Third-Generation Semiconductor
- Solar Photovoltaic Cells

- New Energy Automobile
- PV/Inverter
- Power Test
- Automotive Electronics

*Provide Testing and Measuring Products  
and Solutions for Industry Customers*

## HEADQUARTER

**RIGOL TECHNOLOGIES CO., LTD.**  
No.8 Keling Road, New District,  
Suzhou, JiangSu, P.R.China  
Tel: +86-400620002  
Email: info-cn@rigol.com

## JAPAN

**RIGOL JAPAN CO., LTD.**  
5F, 3-45-6, Minamitsuka, Toshima-Ku,  
Tokyo, 170-0005, Japan  
Tel: +81-3-6262-8932  
Fax: +81-3-6262-8933  
Email: info.jp@rigol.com

## EUROPE

**RIGOL TECHNOLOGIES EU GmbH**  
Carl-Benz-Str.11  
82205 Gilching  
Germany  
Tel: +49(0)8105-27292-0  
Email: info-europe@rigol.com

## KOREA

**RIGOL KOREA CO., LTD.**  
5F, 222, Gonghang-daero,  
Gangseo-gu, Seoul, Republic of Korea  
Tel: +82-2-6953-4466  
Fax: +82-2-6953-4422  
Email: info.kr@rigol.com

## NORTH AMERICA

**RIGOL TECHNOLOGIES, USA INC.**  
10220 SW Nimbus Ave.  
Suite K-7  
Portland, OR 97223  
Tel: +1-877-4-RIGOL-1  
Email: sales@rigol.com

## For Assistance in Other Countries

Email: info.int@rigol.com

**RIGOL®** is the trademark of **RIGOL TECHNOLOGIES CO., LTD.** Product information in this document is subject to update without notice. For the latest information about **RIGOL's** products, applications and services, please contact local **RIGOL** channel partners or access **RIGOL** official website: **www.rigol.com**